



# ENGINE VIEW 35

3.5-inch CAN Bus Display with Ready-to-Use Engine Monitor

- Functions as a J1939 engine monitor
- Powerful processor with sub-second boot time
- Scratch-resistant/anti-glare cover glass is optically bonded to LCD for superior mechanical and visual performance
- Bright, 1000-nit display is backlit and provides high-contrast text and full-color graphics for excellent sunlight readability
- Convenient flush mounting provides a modern look and feel to seamlessly blend with vehicle cab design
- Armrest, A-post, and dashboard mounting
- Rugged design for extreme environments
- Easy to configure J1939 monitoring



## YOUR EXPERTS IN CAB CONTROLS

Grayhill specializes in the design, development, and production of human interface controls, including:

- Cab user interface design
- Customized control panels
- CAN bus interface devices

# VERSATILE DISPLAY. MANY FEATURES.

## Bright.

This 3.5-inch backlit LCD (480×320) is very bright (1000 nits) providing good daylight readability. It has software controlled LED backlighting and 18-bit color.

## Adaptable.

Designed for integration into off-highway vehicles. It functions in 12 V/24 V operation and is sealed against the ingress of liquids and dust.

## Rugged.

The protective cover lens is scratch resistant glass, not plastic. Optical bonding of the cover glass improves impact resistance.

## Powerful.

The powerful embedded computer can monitor and display many events simultaneously:

- 550 MHz
- 16 MB RAM
- 32 MB Flash

## Adjustable.

- Select from 65 J1939 parameters
- Display parameters in a 4-up or 6-up screen
- Rapidly switch between 2 screens of parameters with the push of a button
- Select ECUID, Select CAN bit rate

## Useful.

Ideal for off-road vehicle applications, portable power applications, portable lighting applications, or anywhere it is necessary to monitor J1939 engine parameters.

## Readable.

Optically bonding the display and cover glass reduces reflections. An anti-glare etching further improves readability in bright sunlight.

## Easy to Configure.

Select what to monitor in the Settings Menu.



# VERSATILE DISPLAY. ALL THE SPECIFICATIONS.

## General Information

Display	3.5" color transmissive TFT LCD, IPS wide viewing angle
Resolution	480×320 pixels, 18 bit color
Aspect Ratio	3:2
Backlighting	LED, 1000 cd/m <sup>2</sup> or nits
Microprocessor	CORTEX M7, 550 MHZ
Flash Memory	32 MB
RAM	16 MB
Real Time Clock	Internal non-rechargeable battery backup
CAN	(2) CAN 2.0 B CAN FD Capable
Inputs	(3) 0-32 VDC discrete digital or 0-10 V Analog
Outputs	(2) digital 200 mA switched high side
Approximate Unit Weight	250 g

## Power Specifications

Operating Voltage	8 VDC to 32 VDC
Power Consumption	3 Watts (typical)

## Electrical Performance Specifications

Maximum Load	ISO 16750-4 5.1.2.2	T(max) = +75 °C
Jump Start Voltage	ISO 16750-2 4.3.2	36 V for 60 min
Short Circuit Protection	ISO 16750-2 4.10	36 V
Reverse Polarity Protection	ISO 16750-2 4.7	-36 V
Starting Profile	ISO 16750-2 4.6.3	12 V, Level II Class B and Level IV Class A 24 V, Level II Class A and Level III Class A
Superimposed Alternating Voltage	ISO 16750-2 4.4	Severity 2 and 3
Load Dump (Unclamped)	ISO16750-2 4.6.4.2.2	12 V: Us = 101 V, Ri = 0.5 Ω, td = 400ms 24 V: Us = 202 V, Ri = 1.0 Ω, td = 350ms
Parallel Inductive Load	ISO7637-2 Pulse 1	-600 V
Wire Harness Inductance Switching	ISO 7637-3 Pulse A & B	CCC Fast a/b: Level 4 -80 V/+80 V ICC Slow a/b: Level 4 -10 V/+10 V

## CE Compliance

EMC	ISO 13766-1:2018	ESA
-----	------------------	-----

## Mechanical Performance

Vibration, Random	ANSI/ASAE EP455 5.15.1	2 hrs each axis 50 Hz to 2000 Hz
Vibration, Sinusoidal	ANSI/ASAE EP455 5.15.2	A logarithmic sweep from 10 Hz to 2000 Hz to 10 Hz over a period of 20 min for 4 hrs in each axis
Shock	ANSI/ASAE EP455 5.14	11 ms half sine pulse of 490 m/s <sup>2</sup> in 3 axis
Drop	ANSI/ASAE EP455 5.14.2 Level 1	400 mm onto a hardwood bench top on all practical edges


## Environmental Specifications

Operating Temperature	ISO 16750-4 Section 5.1.1.2, 5.1.2.2	-30 °C to +75 °C
Storage Temperature	ISO 16750-4 Section 5.1.1.1, 5.1.2.1	-40 °C to +85 °C
Thermal Shock	ISO 16750-4 Section 5.4.3	
Altitude (Barometric Pressure)	ANSI/ASAE EP455 5.2.2	101.3 kPa to 18.6 kPa
Ingress: Wash Down	ISO 20653	IPX9K
Ingress: Submersion	ISO 20653	IPX7
Ingress: Sand and Dust	ISO 20653	IP6K
Solar Radiation	ISO 4892-2	Method B, Cycle 2
Storage Humidity	ISO 16750-4	85% humidity at 40 °C for 240 hrs
Chemical Resistance	ISO 16750-5	Table 1 except battery fluid and runway de-icer
Screen Impact	IK7 rating	2 joules

## Electromagnetic Compatibility Specifications


ESD	ISO 10605-2008 (Handling) ISO 10605-2008 (Powered)	±25 kV Air, ±15 kV contact ±20 kV Air, ±15 kV contact
Radiated Immunity	ISO11452-2	ALSE: 80-2000 MHz CW 100 V/M ALSE: 80-2000 MHz AM Mod 1 KHz 80% 100 V/M ALSE: 800-2000 MHz PM1 Mod 100 V/M
Conducted Emissions	CISPR25	Level 3
Radiated Emissions	ISO14982	
Conducted Immunity	ISO 11452-4	0.5-400 MHz 100 mA, 1 KHz AM 80% Mod 0.5-400 MHz 100 mA, CW

## DIMENSIONS in millimeters [and inches]

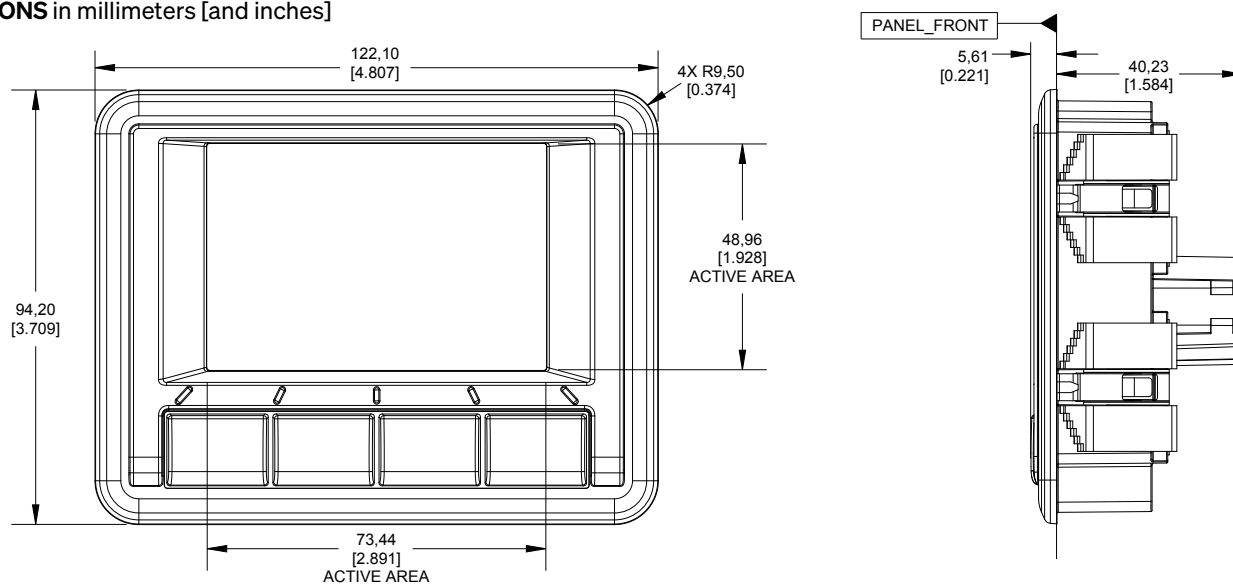


## RECOMMENDED PANEL CUT OUT

Tolerances for this sheet are  $\pm 0.50$  [0.020].

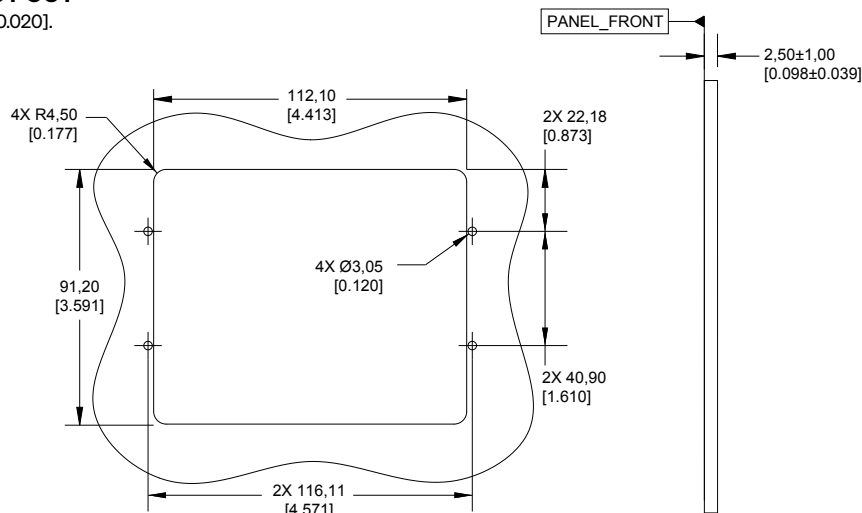

## REAR CONNECTOR



Mating Connector: DEUTSCH DT06-12SA

## PINOUT

Pin	Function	Pin	Function	Pin	Function	Pin	Function	Pin	Function	Pin	Function
1	VIN Positive	2	VIN Return	3	NC	4	NC	5	NC	6	NC
7	NC	8	NC	9	NC	10	NC	11	CAN1 HI	12	CAN1 LO

NC is no connect — reserved for future use.

## VERSATILE DISPLAY. ORDER INFORMATION.

ITEM	CAN1	CAN2	RTC
3D35EVW-100	Y	Y	Y

Specifications are subject to change.